

Rugged Industrial PDA 4.3"

E430RM4

Product Features:

- 4.3" 800x480 Panel with Projective Capacitive Multi-touch.
- Built-in Wi-Fi/ Bluetooth/ GPS / 3G
- Built-in 2 Mega-pixel camera at front side and 8 Mega-pixel camera with LED at rear side
- Support NFC Function
- Water and dust proof ID IP65 design
- Compliance with MIL-STD-810G for High/Low temperature, Vibration, Drop test
- Support Android 4.2 operating system
- 3900 mAh full-day battery with removable design

Product Specifications:

System Specification	Processor	ARM® Cortex™-A7 Quad Core 1.5Ghz
	System Memory	1GB SDRAM
	Storage	4GB eMMC(Optional to 32GB, MOQ:1K)
Display Specification	Operating System	Android 4.2
	Size	4.3"
	Resolution	480 x 800
	Brightness	400(typ.)
Wireless Communication	Touch	Projective Capacitive Multi-touch
	WLAN	802.11 a/b/g/n
	Bluetooth	Bluetooth V3.0+EDR
	WWAN	GSM / GPRS / EDGE / WCDMA / HSDPA / HSUPA
	GPS	Built-in GPS module
System I/O Buttons Indicators Sensors	Audio	1 x Built-in Mic, 1 x Earphone, 1 x 1.2W Speaker
	External I/O	1 x SIM card slot, 1 x Micro SD card slot, 1 x Micro USB
	Buttons	1 x Volume - +, 1 x Power button, 1 x Function button
	LED	1 x LED indicator
	Sensors	Light Sensor, Proximity Sensor, G-sensor, Digital Compass
Data Capture	Camera	Rear: 8 Mega-Pixel Camera with LED auxiliary light (Auto Focus) Front: 2 Mega-Pixel Camera
	NFC	Read / Write mode (Refer to NFC Tag Support table) Peer to Peer mode
Mechanical and Environment	Dimension (W x L x H)	132.57 x 81.87 x 27.4 mm
	Weight	260g
	Operating Temperature	-20 deg.C to 60 deg.C(AC Mode) -10 deg.C to 50 deg.C(Battery Mode)
	IP Proof	IP65
	Shock	MIL-STD-810G Method 516.6 Procedure I
	Vibration	MIL-STD-810G Method 514.6 Procedure I
	Drop	MIL-STD-810G Method 516.6, 4 ft, Free to concrete
Power Management	Certifications	CE, FCC, CCC
Power Management	Battery	3.7V 3900mAh Li-poly removable battery
	Battery Operating Time	20Hr *
	Adapter	5V 1A Adapter


*Note: Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.



NFC Tag Support

Support Card Type (13.56 MHz)	
NFC Forum Platform	Type 1, Type 2, Type 3, Type 4
ISO 15693	TI HF-I Plus, TI HF-I Pro, NXP-Code SLI
ISO 14443-A	NXP Mifare_One(S50_4byte), NXP Mifare_One(S50_7byte), NXP Mifare_One(S70_4byte), NXP Mifare_UltraLight, NXP Mifare_UltraLight C, NXP Mifare_DesFire_EVI
ISO 14443-B	ifineon JTOP
ISO 18092(R/W)	SONY Felica Lite s, SONY Felica Lite

Drawing

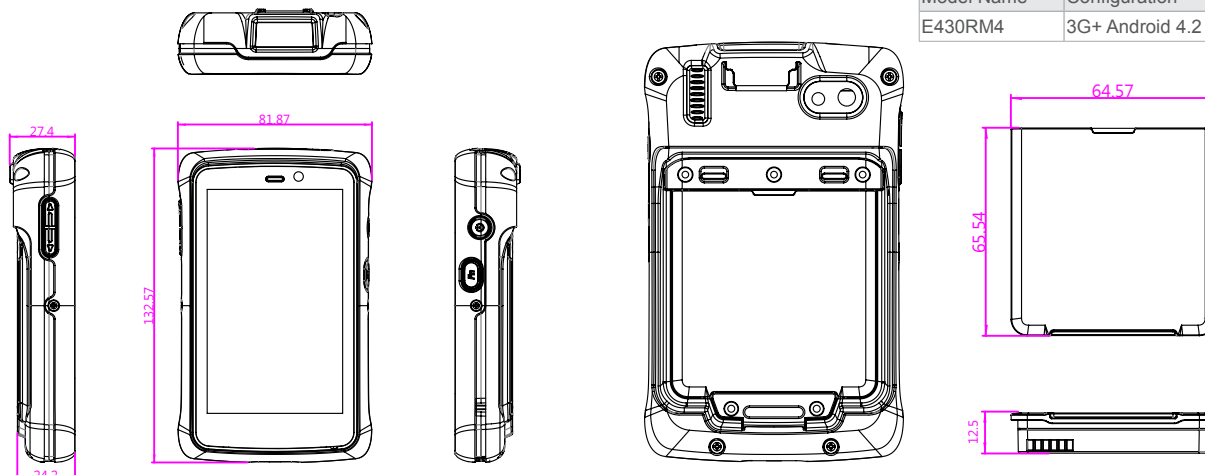

Order Information:

Model Name	Configuration
E430RM4	3G+ Android 4.2